



Prepare for the Installation.

To prepare for the installation you will need to gather needed tools/parts.

Needed tools may include:

- Screwdrivers
- Wire Strippers and Cutters
- Crimping Tool
- Zip Ties and/or Screws.

Install the Device.

Wiring the device is an easy installation. The Linxup 4700 has a series of wires, you will only need to attach three of these wires (the additional wires are for future features or functions). The three wires you need are: the Red Wire (Power), the White Wire (Ignition), and the Black Wire (Ground). Follow these steps to install the device:

1. Find the constant Power Wire on your asset. Cut and strip this wire.
2. Strip the Red and White Wires on the Linxup 4700 GPS device.
3. Connect the Red and White Wires of the device and the constant power wire on your asset and crimp. This connection provides power to the device.
4. Strip the Black Wire on the Linxup 4700 GPS device.
5. Connect the Linxup Black Wire to a grounded source.
6. Using screws and/or plastic zip ties as appropriate, secure the device to your asset.


Confirm the Power Connection.

Following installation, allow 5-10 minutes for the Linxup device to power up, then use the LED indicators to ensure that you have good power source.

Your Installation is Complete.

PLEASE NOTE:

Your device monthly service plan is active upon delivery of the devices, not installation.

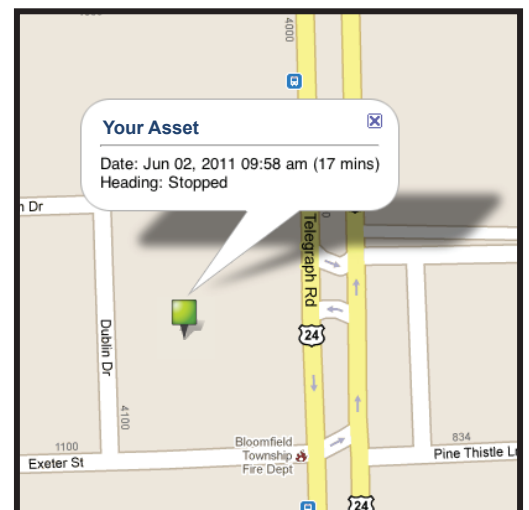

If you have difficulties or questions (including billing inquiries), please contact Linxup Customer Support:

Phone: 1-877-732-4980
Email: support@linxup.com